ACCESSORIES

FOR AUTOMATIC LUBRICATOR

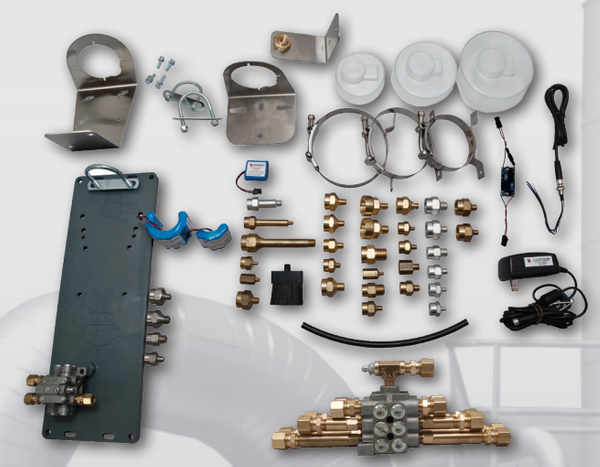

ACCESSORIES

- Progressive Distribution Blocks and Kits - 2,3,4,6,8,12 Port
- Battery Packs – Alkaline + Lithium
- Brackets / Clamps
- Adaptors – Standard & Metric
- Mounting Plates
- Weatherproof Caps (Optional)
- Nylon Hose
- Oil Brush
- Remote Control Options
  - Remote Control
  - Remote Power
  - Remote Power + Remote Control
  - DC Power
  - DC Power + Remote Control
  - Vibration Sensor Control
  - Motion Activated Control
  - Pulse Counter Control
- Bluetooth in Progress

www.atselectrolube.com

ABOUT US

A.T.S. ELECTRO-LUBE™ INTERNATIONAL INC. has been manufacturing and selling ELECTRO-LUBER™ Automatic Electronic Lube Dispensers worldwide for 40 years. The product was invented and designed by our founder, and is manufactured in British Columbia, Canada.

With market trends changing, the company introduced a new line of motorized lubricators for the industrial market. The ULTIMATE LUBER™ series provides single and multi-point lubrication using progressive distribution blocks. These units are the most powerful self-contained lubricators in the world.

The TITAN CL LUBER™ was then introduced, which incorporates the proven pump and electronics of our ULTIMATE series while using industry standard grease cartridges for ease of refilling. The dual cartridge TITAN II motor-driven lubricant dispenser followed.

The latest additions to our product line of lubricators are the powerful TITAN OILER and the JACK-LUBER™. We also offer a variety of accessories to complement our products.

ATS is committed to improving and developing products to satisfy the growing needs of industries for decades to come. We will continue to adapt to market demands and expand our product line with the same dedication to quality as we always have. You can depend on ATS to sell only top-of-the-line, versatile, automatic lubrication equipment for your every application.

40 YEARS OF MANUFACTURING RELIABLE LUBRICATION PRODUCTS FOR AN INDUSTRIAL WORLD

TYPICAL INDUSTRIES AND APPLICATIONS

Mining/Minerals	Stacker Cranes
	Crushers/Grinders/Shakers
	Bucket Elevators
	Conveyors
	Slurry Pumps
Manufacturing	Bridge Cranes
	Conveyors
	Hoists
	Heat Treat furnaces
	Chain Lubricators
	Robots
Oil and Gas	Electric Motor
	Pump Jacks
	Cooling Fans
Energy	Coal Handling Equipment
	Drills, Pumps
	Refinery Operations
	Wind Turbines
Food and Beverage	Packaging Lines
	Mixers
	Washers, Dryers
	Can/Bottling Lines
	Ovens
Building Maintenance	Elevators/Escalators
	Motors
	HVAC
	Air Handlers/Filters
Municipal	Waste Water Treatment
	Potable Water Plants
	Incinerators
Metals	Rolling Mills
	Material Handling
	Cooling Pumps
	Furnace Trunions and Fans
Pulp and Paper	Lumber Mills
	Paper and Fiberboard Mfg.
	Slurry Pumps
	Dryers
Agriculture	Flour Mills
	Grain Mills
	Feed Mills

Distributed By:

Email: info@atselectrolube.com or sales@atselectrolube.com

MADE IN CANADA

www.atselectrolube.com

7388 Wilson Avenue, Delta, BC Canada V4G 1H3

THE MOST POWERFUL SELF-CONTAINED LUBRICATORS IN THE WORLD

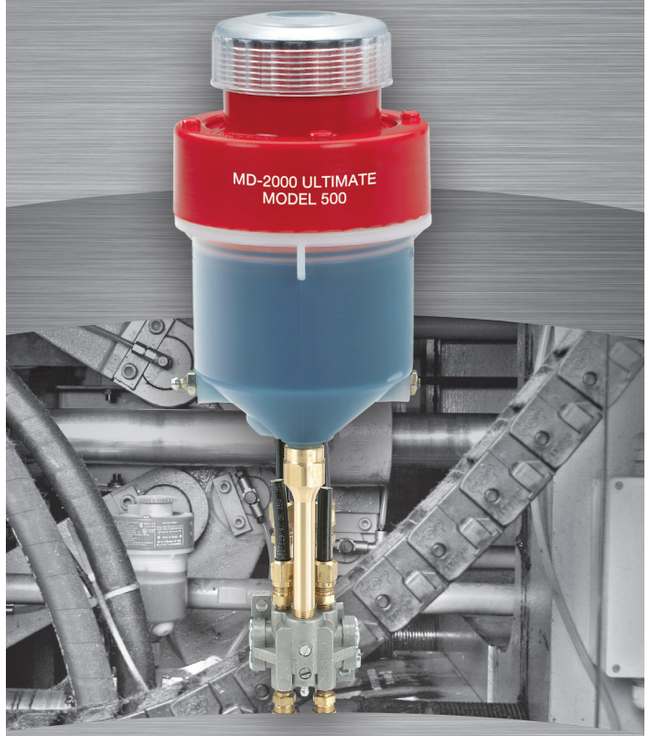

ATS ELECTRO-LUBE
INTERNATIONAL INCORPORATED

www.atselectrolube.com

TOLL FREE PHONE: **1-800-663-8141**

ELECTRO-LUBER SERIES

GAS-DRIVEN LUBRICANT DISPENSER – 50 PSI

Remote Control Options available for all series

16 oz/ 475cc | 8 oz/ 250cc | 4 oz/ 125cc | 2 oz/ 60cc

JACK SERIES

MOTOR-DRIVEN JACKSCREW LUBRICANT DISPENSER – 200 PSI

Jack 125 Luber & Replacement Cartridge

Jack 250 Luber & Replacement Cartridge

ULTIMATE SERIES

MOTOR-DRIVEN LUBRICANT DISPENSER – 1000 PSI

Includes Internal Homogenizing Mixer

17 oz/ 500cc | 8 oz/ 250cc | 4 oz/ 125cc | 2 oz/ 60cc

TITAN SERIES

MOTOR-DRIVEN LUBRICANT DISPENSER – 1000 PSI

Includes Internal Homogenizing Mixer

Titan II

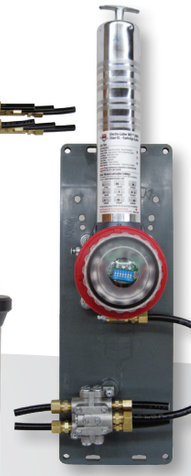

Titan

Titan Oiler

COMPARE AT A GLANCE	ELECTRO-LUBER SERIES	JACK SERIES	ULTIMATE SERIES	TITAN SERIES
APPLICATION	Single Point	Single Point	Single and Multi-point (up to 12 points)	Single and Multi-point (up to 12 points)
SIZES	Available in 2, 4, 8, or 16 oz. capacity (60, 125, 250 or 475cc)	Available in 4 oz. capacity (125cc) & 8 oz. (250cc) capacity	Available in 2, 4, 8, or 17 oz. capacity (60, 125, 250 or 500cc)	Requires 1 or 2 - 14oz. grease cartridge. Oiler has 47 oz. capacity
TECHNOLOGY	Safe, Inert Nitrogen gas powered	Jackscrew mechanism	Powerful mechanical fixed-displacement pump	Powerful mechanical fixed-displacement pump. Proven Ultimate Series technology
DISPENSING POWER	Up to 50 psi/3.45 bar. Single Point can be remote mounted to 3 ft. using 1/4" ID hose	200 psi/13.79 bar. Single Point can be remote mounted up to 20ft using 1/4" ID hose.	Over 1000 psi/68.95 bar. Single Point can be remote mounted up to 35 ft. Multi-Point can be remote mounted up to 20ft using 1/4" ID hose. Distribution blocks available.	Over 1000 psi/68.95 bar. Single Point can be remote mounted up to 35 ft. Multi-Point can be remote mounted up to 20 ft. Oiler up to 200 ft. or multi-point up to 60ft using 1/4" ID hose. Distribution blocks available.
POWER SOURCE	AA Alkaline Batteries	Lithium Battery pack or remote AC/DC power	Alkaline Battery pack or remote AC/DC power Optional lithium battery pack - 4 or 8 cells	Alkaline Battery pack or remote AC/DC power Optional lithium battery pack - 8 cells
CYCLE	Single use, Disposable	Reusable motor drive unit and easily replaceable single-use cartridge	Refillable with standard grease gun or pump	Refillable with standard grease cartridge(s). Oiler refillable through screened port
LUBE CHOICE	Customer specified lube	Customer specified lube. Replaceable cartridge	Customer Fill/Refill as needed	Customer replaced cartridge or oiler refilled as needed
OPERATING SPAN	15 days to 1 year on factory filled unit	Variable from 15 days to 2 years. Optional custom programming available	Variable from 15 days to 2 years. Optional custom programming available	Variable from 15 days to 2 years. Optional custom programming available
LED INDICATORS	Red LED - Positive verification unit is working	Tri-color LEDs indicate normal operation, low battery	Tri-color LEDs to indicate normal operation, low battery, low temp.	Tri-color LEDs indicate normal operation, low battery, low lube level, low temp. Oiler has low lube indicator.
WEATHERPROOF	Waterproof (Submerged) to 30 ft Temp range -40°F to 131°F (-40°C to 55°C) Weathercap available upon request	Suitable for outdoor use in temp range -4°F to 131°F (-20°C to 55°C). Use special lithium battery pack for colder/hotter temperatures. Weathercap included + must be used.	Suitable for outdoor use in temp range -4°F to 131°F (-20°C to 55°C) Weathercap included + must be used	Suitable for outdoor use in temp range -4°F to 131°F (-20°C to 55°C) Weathercap included for cartridge and motor housing.
DISPENSING RATE	Established constant flowrates, simply select and install	Standard timed intervals or custom programming available	Standard timed intervals or custom programming available	Standard timed intervals or custom programming available
APPROVALS	UL & CuI approved Intrinsically Safe for all areas; Class I, Groups A, B, C, D; Class II, Groups E, F, G; Class III, hazardous locations; MSHA; ATEX and IECEx c UL us	Class I, Div 2, Groups A, B, C, D. Class II, Div 2, Groups F & G Class III hazardous locations c UL us T–Code T6 55°C PATENTED	Class I, Div 2, Groups A, B, C, D. Class II, Div 2, Groups F & G Class III hazardous locations c UL us T–Code T6 55°C PATENTED	Class I, Div 2, Groups A, B, C, D. Class II, Div 2, Groups F & G Class III hazardous locations c UL us T–Code T6 55°C PATENTED

TOLL FREE PHONE: 1-800-663-8141 TOLL FREE FAX: 1-800-663-8140 TEL: (604) 946-1308 FAX: (604) 946-0427 www.atselectrolube.com